

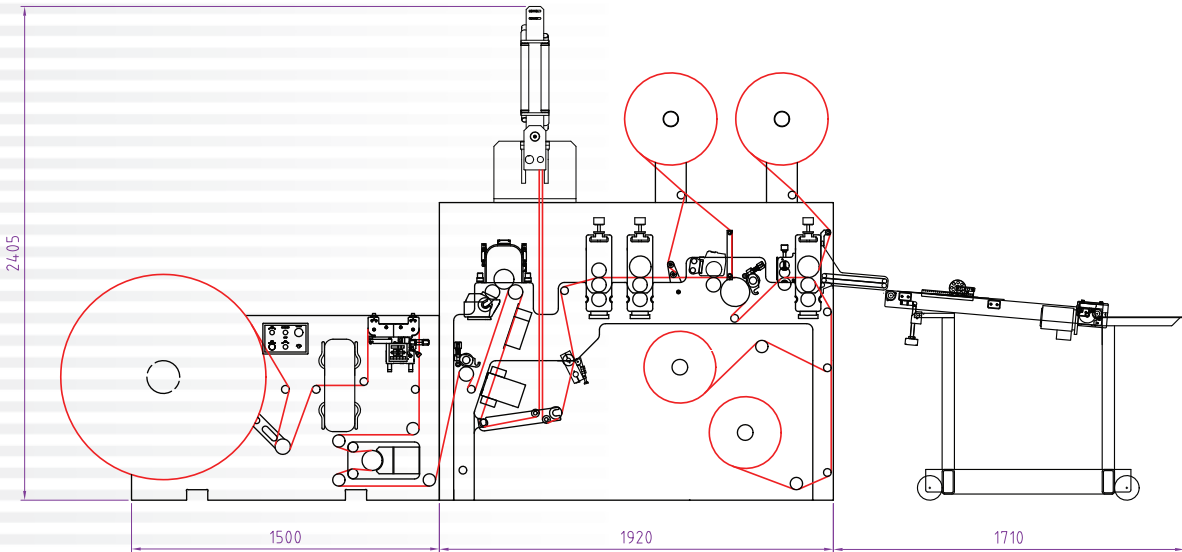


R E F L E X ' S ' S P E C I F I C A T I O N S			
Number of Colours	1	Rotary Slitting	Standard
Re-Register System	Optional	Max Unwind Diameter	650mm (Std) 1000mm(Optional)
Max Print Width	10"(254mm)/13"(330mm)	Max Rewind Diameter	22" (600mm)
Print Range	7-20" (178-510mm)	Max Speed	120m/min (Mechanical)
I.R Drying	Standard	Other Options Turn Bar, Cold Foil, Lamination, Rotary Cutting/Slitting, Sheet Stacker, Web Cleaner, Corona Treater, Video Inspection. Double Unwind, Double Rewind, Digital Ink-jet.	
U.V or LED Drying	Optional		
Rotary Die Cutting	1 std, 2nd Optional		
Semi-Rotary Die Cutting	Optional		
Rotary Sheeting	Standard		

Reflex with unwind, turn-bar and stacker

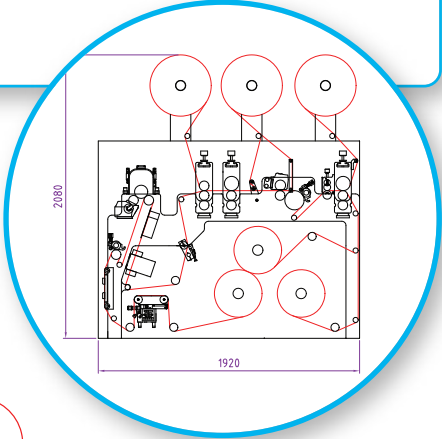

Reflex with turn-bar and stacker

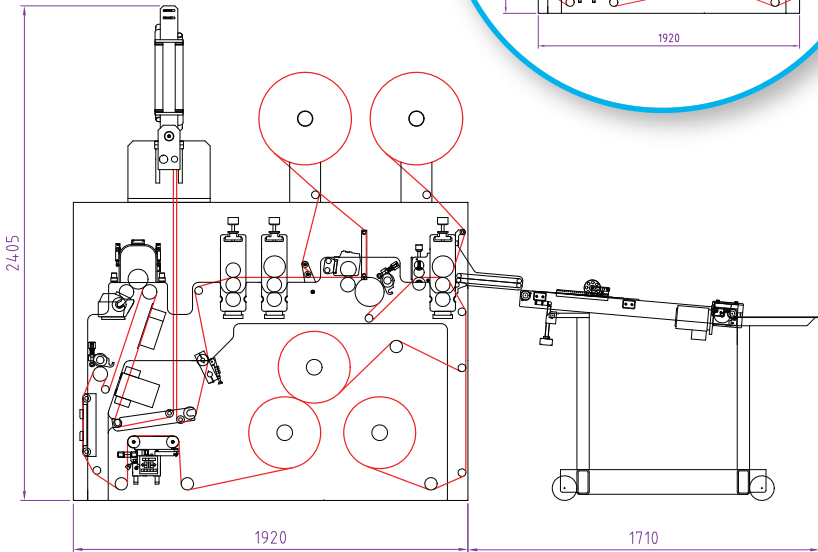

Take a closer look

FOCUS REFLEX SERVO 250/330

Digital Finishing Systems

SEMI & FULL ROTARY CONVERTING SOLUTIONS



DIGITAL FINISHING SYSTEMS

re-FLEX



FOCUS

LABEL MACHINERY LTD

Focus Reflex Servo

DIGITAL FINISHING SYSTEMS

Printing in a competitive market today requires high productivity, quality– and a cost-efficient operation. Focus Label Machinery manufactures a wide range of equipment, designed to meet specialised applications.

The success of the Reflex Servo coincides with the huge growth in Digital Print technology. Focus has designed an affordable Full or Semi Rotary Servo based system for converting & finishing of pre-Printed media, with the capability of adding printed Information, protective coatings and die-cutting features in a single or multiple pass. The 250/330mm web widths naturally complement the growing digital formats for short & medium run lengths.

The Reflex S is also an outstanding performer as a single colour flexo press for 'Roll to Roll' or Roll to Sheet' converting applications.

INTRODUCTION:

The Re-register option is easy to operate and is capable operate of running speeds up to 120 m/min.

The bonus feature of this equipment is that it can be used as a stand-alone production tool in its own right, for converting blank & single colour labels, tags & tickets. etc

- > Compact, Single Colour Flexo Converting Press
- > Servo Controlled Re-Register System
- > UV / LED & IR Drying Options
- > Full or Semi-Rotary Die-cutting
- > High Speed Production
- > Wide Range of Options



TURN BAR

Turn bar units are movable between print stations for greater versatility, with Delam & Re-lamination options for printing on the reverse side of the web or even Multi-Peel labels.



COLD FOIL LAMINATION

The perfect system to add value to a printed web without the cost of specialist tooling. Cold foil technology combines traditional UV flexographic printing technology with special foil lamination for decorative & security applications.



VIDEO INSPECTION

For inspection of the moving web at high speed a number of low cost Video inspection systems are available.




PLC INTERFACE CONTROL

The Operator interface is designed to be intuitive and simple to use, providing finite control & feed back over web tensions, auto register, variable machine speed, adjustable drying systems. In auto register mode the digital drive technology accurately monitors the pre-printed image, utilising it as a reference for any additional processing such as Printing, Cold Foil, Laminating, Varnishing, Die cutting or Sheeting.




WEB GUIDE

The built in Splice table allows trouble free changing of rolls of materials. The Web guide with twin roll guides & edge sensor ensures rolls are delivered through the press accurately. Front mounted controls are easily accessed.



EXTERNAL UNWIND

With a Built in Web Guide & Splice Table the Unwind Module increases capacity to a massive 1000mm diameter capacity for volume production. Facilities for optional Corona & Web Cleaning systems are provided.



SERVO DRIVE TECHNOLOGY

The new drive system provides precise control of the web. The closed loop digital tension system monitors in feed and rewind tensions to ensure smooth running from maximum diameter to the end of the roll.



DIGITAL INK JET

Hybrid inkjet printing can be achieved by adding mono-colour or CMYK inkjet systems for short run or variable data printing, with in-line flexo print/varnish and converting/finishing.



CORONA TREATER & WEB CLEANER

Focus provides the facility to add a wide range of options including single or double sided web treatment systems. Anti-static systems can also be supplied for Synthetic Substrates.



DRYING TECHNOLOGY

A choice of advanced drying systems is available. Infra-red systems are standard, combined with forced air & waste extraction. An integrated UV or LED system is optional. All systems are adjusted through the PLC Control system to adjust with Press speed.



REWIND

A direct Servo Driven Rewind ensures that rolls are perfectly wound ready for further finishing operations or direct delivery to your client. 75mm Air cores are standard, and alternative cores sizes can be supplied.



ROTARY / SHEETER DIE STATION


A single Rotary Die Station & dedicated Die/Sheeter Station are standard equipment, with an additional station available as an option. Semi-Rotary Die Cutting is also available as an option. Robust all steel construction ensures perfect converting even on the most difficult of substrates. Front & Back Die cutting facilities are provided, Register adjustment is provided in all directions . Various stacking systems are available for Roll to sheet converting applications.



SLITTING

A dedicated Slitting System is standard equipment for edge trimming or slitting individual lanes of labels. The system is easy to set up and adjust. Perforation wheels can also be supplied.

STANDARD REFLEX



REFLEX WITH LARGE CAPACITY UNWIND

