


ISH 330 + S 300

Independent Label Sheeter



ISH 330 Sheeter


- ▶ electronic control
- ▶ TOUCH-SCREEN setting for parameter and operate
- ▶ processes transparent materials
- ▶ processes printed and blank materials
- ▶ optical sensor register control
- ▶ preset counter
- ▶ sheet conveyor belt with signal for larger gap to separate counted amounts
- ▶ Integrated unwind with roll end sensor
- ▶ pneumatic pressure wheel
- ▶ vacuum web tension (vacuum pump integrated)
- ▶ stand alone or in-line with printing or converting machine
- ▶ crush knife slitting unit (OPTION)

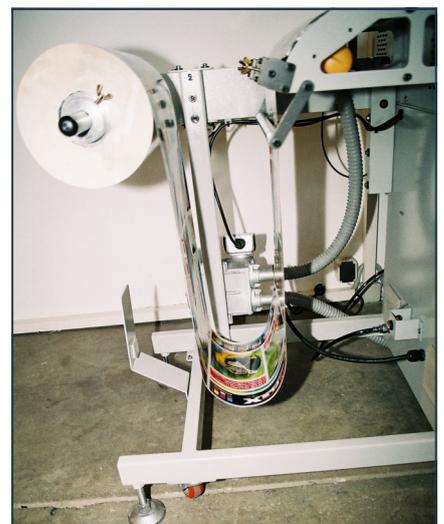

Grafische Systeme Volker Schischke Handelsgesellschaft mbH
Nikolaus-Otto-Straße 8 • D-40670 Meerbusch
Telefon +49 (0) 2159 - 696490 • info@grafische-systeme.com
www.grafische-systeme.com

ISH 330 + S 300

Independent Label Sheeter

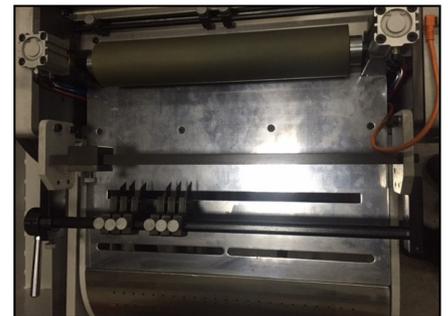

Technical Data

Unwind:	loop controlled speed
Roll diameter max.:	550 mm
Web width max.:	330 mm
Cutting length:	variable, programable, 500 mm max., incl. SKIP function and cut out
Speed max.:	200 cuts/min (depends on size and material)
Power supply:	220 Volt 10 Amp
Air supply:	min. 6 bar
weight:	250 kg
measurement L/W/H:	1980 mm x 900 mm x 1038 mm



S 300 Sheeter

- ▶ in line with flat bed printing press
- ▶ web width 300 mm
also 170 or 400 mm possible
- ▶ sheet conveyer with gap signal
- ▶ preset counter
- ▶ 160 cut/min (S 300 and S 400)
- ▶ 200 cut/min (S 170)



11.2023 • subject to alteration



Grafische Systeme Volker Schischke Handelsgesellschaft mbH
Nikolaus-Otto-Straße 8 • D-40670 Meerbusch
Telefon +49 (0) 2159 - 696490 • info@grafische-systeme.com
www.grafische-systeme.com