


LINK FLX-350 / 450 / 550

Flexo printing machine

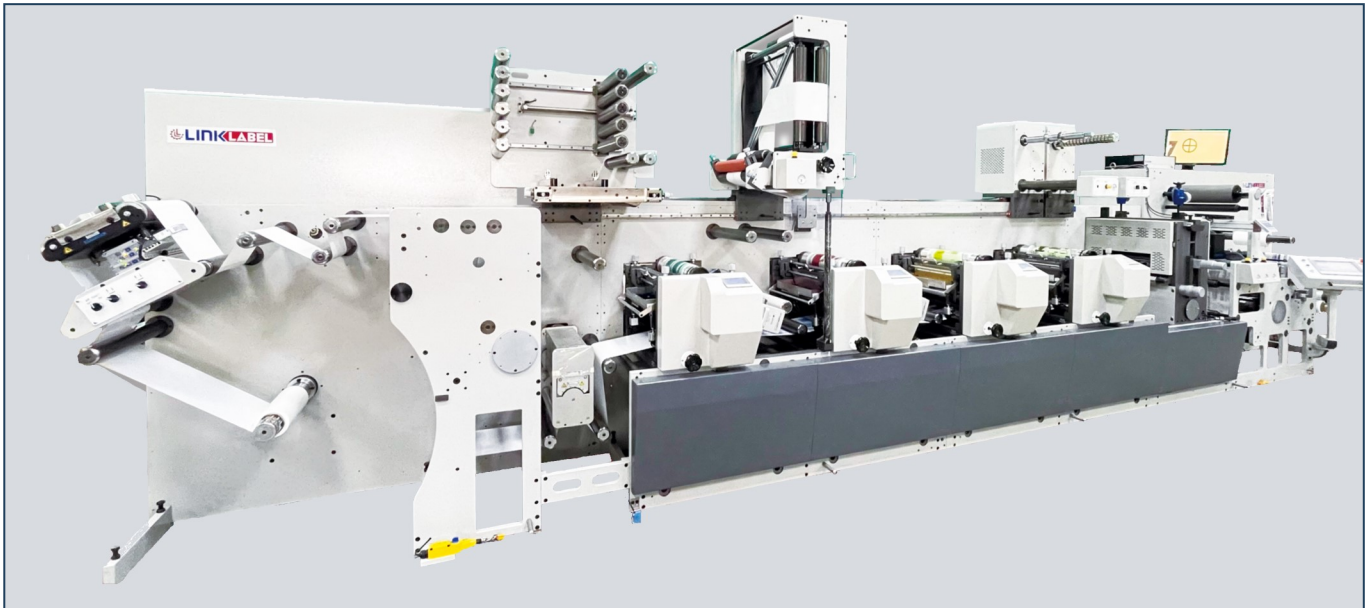

Features

- ▶ up to 10 printing units
- ▶ UV drying
- ▶ fully rotary or semi rotary die cut
- ▶ servo motor driven
- ▶ 12" anilox rollers
- ▶ 27" chilled impression rolls
- ▶ preregister
- ▶ mark auto register control
- ▶ non stop job changing
- ▶ online diagnostic and service

Accessories

- ▶ web cleaner
- ▶ corona
- ▶ delam/relam
- ▶ buffer
- ▶ turn bar
- ▶ lamination and cold foil unit

Option

- ▶ in-line configuration with semi rotary or flat bet finishing units
- ▶ as hot foil, screen printing



Markets

- ▶ labels
- ▶ shrink sleeves
- ▶ flexible packing
- ▶ in mould labels
- ▶ folding boxes



Technical Data

web width	350, 450, 550 mm
printing width	340, 440, 540 mm
printing length	139,7 - 609,6 mm
gear pitch	1/8"
die cutting length	254 - 609,6 mm
speed	200 m/min
roll diameter	
unwind	max. 1000 mm
rewind	max. 1000 mm
roll weight	
unwind	max. 275 kg
rewind	max. 275 kg
plate thickness	1,14 mm
tape thickness	0,38 mm
material thickness	12 - 459 Micron

suitable for OPP, BOPP, PVC, PE, PET, paper, adhesive material, thermal paper, cardboard, laminated materials