


LINK FLX-350 / 450 / 550

Flexo printing machine

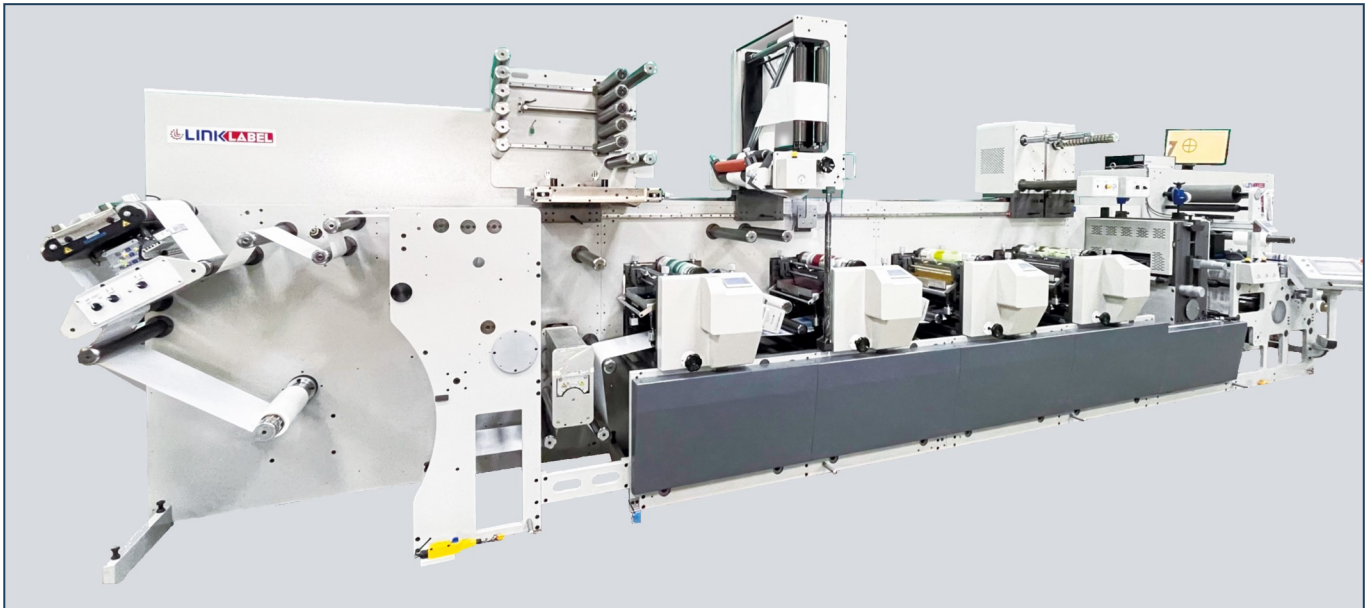

Link Label's **FLX** flexographic printing machine is a leading edge production line developed to meet the highest demands for manufacturing labels and flexible packaging.

The standard equipment includes a cooling system which allows processing of thermo-sensitive materials without any problems.

In-line configuration with additional units is possible to form a complex finishing machine. Flat screen printing and hot foil stamping, either flat or semirotary are available.



Features

- ▶ up to 10 printing units
- ▶ UV drying
- ▶ fully rotary or semi rotary die cut
- ▶ servo motor driven
- ▶ 12" anilox rollers
- ▶ 27" chilled impression rolls
- ▶ preregister
- ▶ mark auto register control
- ▶ non stop job changing
- ▶ online diagnostic and service

Options

- ▶ web cleaner
- ▶ corona
- ▶ delam/relam
- ▶ buffer
- ▶ turn bar
- ▶ lamination and cold foil unit



Grafische Systeme Volker Schischke Handelsgesellschaft mbH
Nikolaus-Otto-Straße 8 • D-40670 Meerbusch
Telefon +49 (0) 2159 - 696490 • info@grafische-systeme.com
www.grafische-systeme.com

LINK FLX-350 / 450 / 550


Flexo printing machine



Markets

- ▶ labels
- ▶ shrink sleeves
- ▶ flexible packing
- ▶ in mould labels
- ▶ folding boxes

suitable for OPP, BOPP, PVC, PE, PET, paper, cardboard, adhesive material, laminates, thermal paper

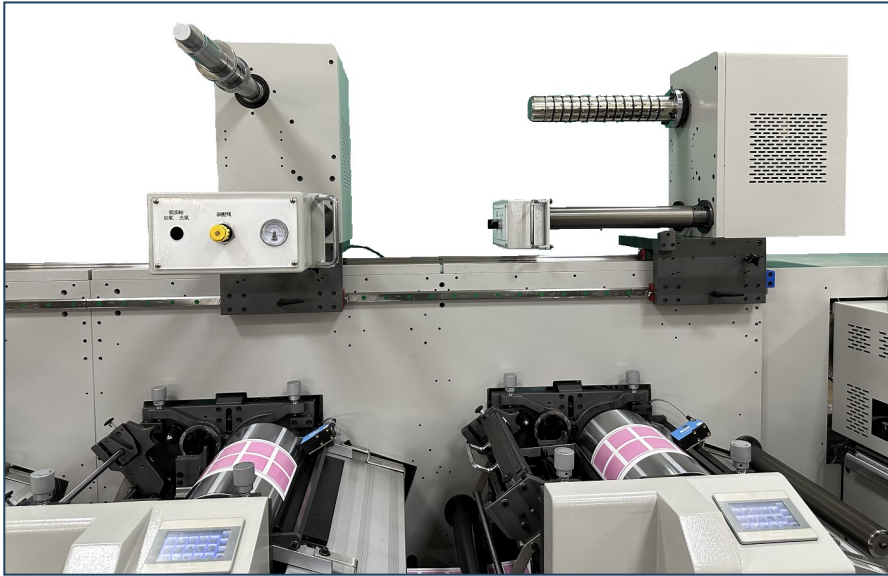

Technical Data

web width	350, 450, 550 mm
printing width	340, 440, 540 mm
printing length	139,7 - 609,6 mm
gear pitch	1/8"
die cutting length	254 - 609,6 mm
speed	200 m/min
roll diameter	
unwind	max. 1000 mm
rewind	max. 1000 mm
roll weight	
unwind	max. 275 kg
rewind	max. 275 kg
plate thickness	1,14 mm
tape thickness	0,38 mm
material thickness	12 - 459 Micron

9.2024 • subject to alteration



Grafische Systeme Volker Schischke Handelsgesellschaft mbH
 Nikolaus-Otto-Straße 8 • D-40670 Meerbusch
 Telefon +49 (0) 2159 - 696490 • info@grafische-systeme.com
www.grafische-systeme.com